


E2 interface:

Addition to the specification E2 interface "specification E2-interface_e2.doc":

These parameters/values[hex] can be read by the E2 interface:

EE07:


command:	return-value	kind	format	measuring-range	output:
Group	0x07				
Sub-Group	0x09				
Available measuring-values	0x03				
Statusbyte:	0x0x				
Measuring value 1:		Humidity	unsig. int	0 - 100%rH	1/100%rH
Measuring value 2:		Temperature	unsig. int	233,15 - 353,15°K	1/100°K
Measuring value 3:		Not defined			
Measuring value 4:		Not defined			

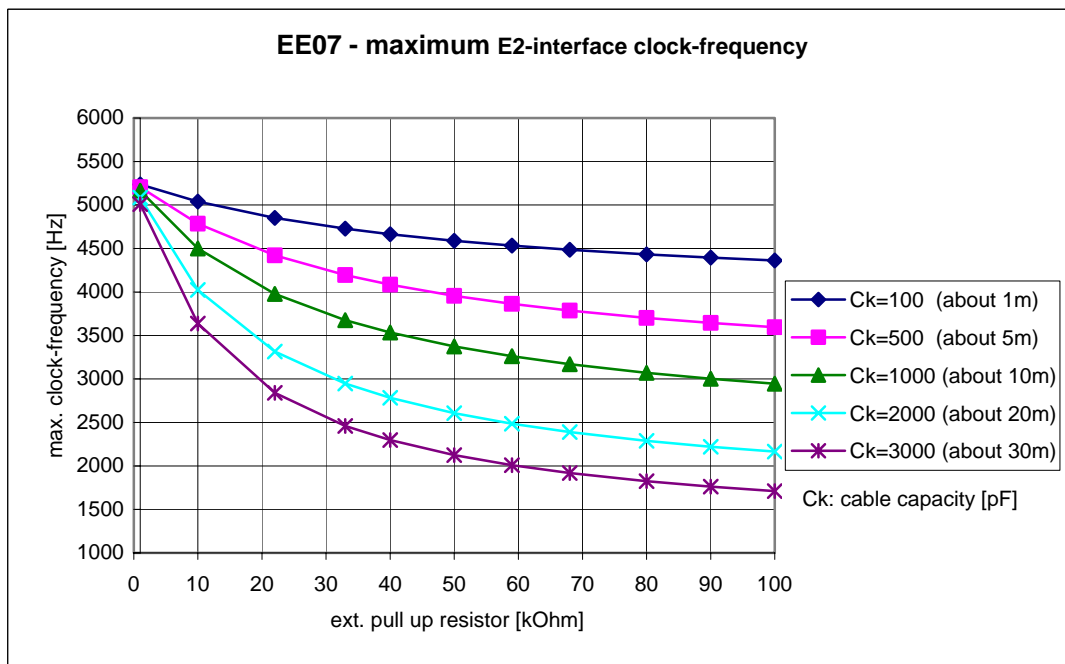

Measurement Timing

	typical	maximum
t_{pwrup}	270 ms	300 ms
t_{meas}	260 ms	300 ms
t_{cfree}	1 sec	

1.) Free running mode

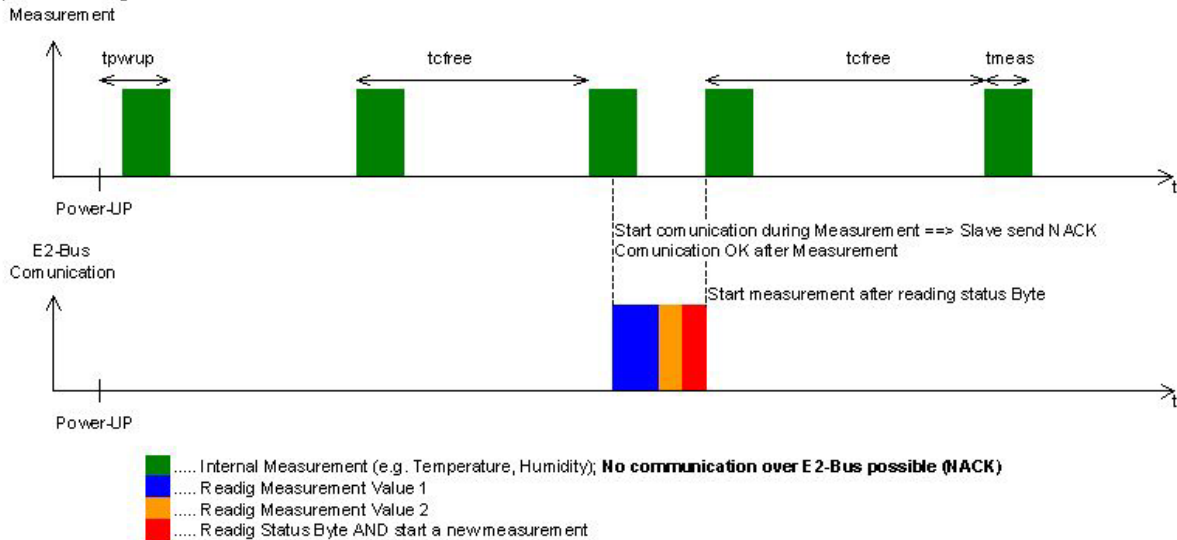

2.) Trigger mode ($t_c < t_{cfree}$)

