

EE80 Series

HVAC Room Transmitter and Switches for CO₂, Relative Humidity and Temperature

EE80 series set new standards in CO₂ measurements for HVAC. The transmitters resp. switches combine CO₂, relative humidity (RH) and temperature (T) measurement in one modern and user-friendly housing.

The basic EE80 version for CO₂ and T can be easily extended with a RH plug-in module.

The CO₂ measurement is based on the infrared principle. A patented auto-calibration procedure compensates for the aging of the infrared source and ensures outstanding long term stability.

EE80 provides analogue outputs (in V or mA). The optional display indicates sequentially the actual measuring data.

As one more option a switching output with adjustable switching point and hysteresis is available.

A wide variety of models ensures an optimal adjustment for customised requirements.



EE80

Typical Applications

building management for residential and office areas
 ventilation control

Features

CO₂ / RH / T measurement in one device
 RH output with plug-in module
 analogue or switching output
 modern design
 optional display
 easiest installation
 long term stability

Technical Data

Measuring values

CO₂

Measurement principle	Non-Dispersive Infrared Technology (NDIR)	
Sensor	E+E Dual Source Infrared System	
Working range	0...2000ppm	0...5000ppm
Accuracy at 20°C (68°F) and 1013mbar	0...2000ppm: 0...5000ppm:	< ± (50ppm +2% of measuring value) < ± (50ppm +3% of measuring value)
Response time t ₆₃	< 90 sec	
Temperature dependence	typ. 2ppm CO ₂ /°C	
Long term stability	typ. 20ppm / year	
Sample rate	ca. 0.5 min	

Relative Humidity

Measurement principle	capacitive	
Sensor element	HC103	
Working range ¹⁾	10...90% RH	
Accuracy at 20°C (68°F)	±3% RH (30...70% RH)	±5% (10...90% RH)

Temperature

Accuracy at 20°C (68°F)	±0.3°C (±0.54°F)	version with current output 4 - 20mA: ±0.7°C (±1.26°F)
-------------------------	------------------	--

Outputs

Analogue Outputs

0...2000/5000 ppm / 0...100% RH / 0...50°C (32...122°F)	0 - 5V 0 - 10V 4 - 20mA	-1mA < I _L < 1mA -1mA < I _L < 1mA R _L < 500 Ohm
--	-------------------------------	--

Switching Output

Max. switching voltage	125V AC / 60V DC	
Max. switching load	0.5A at 125V AC	1A at 30V DC
Min. switching load	1mA at 5V DC	
Contact material	Ag+Au clad	

General

Supply voltage SELV	24V AC ±20%	15 - 35V DC	SELV = Safety Extra Low Voltage
Power requirement	< 3 W		
Warm up time ²⁾	< 5 min		


Display	LC display: alternating CO ₂ (ppm) / T (°C or °F) / RH (% RH)		
Electrical connection	screw terminals max. 1.5 mm ² (AWG16)		
Electromagnetic compatibility	EN 61000-6-3 EN 61000-6-1	EN61326-1+A1+A2:05.2002	CE
Working temperature range	0...90% RH (non condensing) / -5...55°C (23...131°F)		
Storage temperature range	0...90% RH (non condensing) / -20...60°C (-4...140°F)		

1) refer to the working range of the humidity sensor HC103!
2) warm up time for performance according specification


Connection Diagram

Analogue Outputs

EE80-xx2/3x

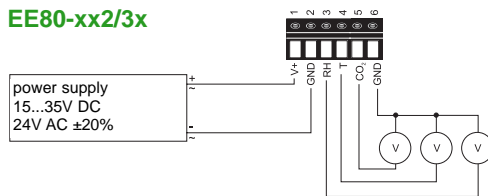


EE80-xx6x

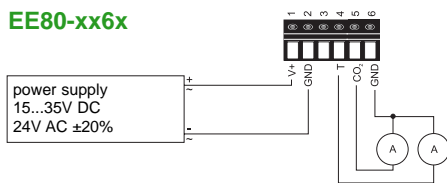


Switching Output

EE80-xCS

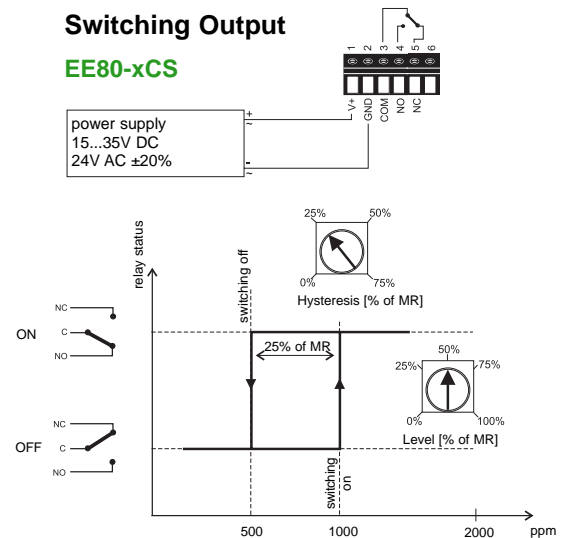

Housing Dimensions (mm)

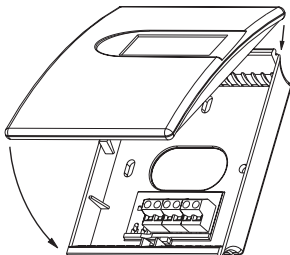

W x H x D = 85 x 100 x 26mm (3.3 x 3.9 x 1")

Material of housing: PC
Protection class: IP20

Colour of housing: Cover: RAL 9003 (signal white)
Back: RAL 7035 (light grey)

(other colours upon request)

Ordering Guide

EE80 voltage / current output:

WORKING RANGE	MODEL	OUTPUT ¹⁾	DISPLAY	T-UNIT	T-SCALE
0...2000ppm (2)	CO ₂ + T (CT)	0-5V (2)	without display (--)	°C (--)	standard (0...50°C) (--)
0...5000ppm (5)	CO ₂ + T + RH (CTF)	0-10V (3) 4-20mA (6)	with display (D04)	°F (E01)	(32...122°F) other T-scaling refer to page 11 (Txx)

EE80-

¹⁾ current output (6) not available for model CTF

EE80 switching output:

WORKING RANGE	MODEL	OUTPUT
0...2000ppm (2)	CO ₂ (C)	switching output (S)
0...5000ppm (5)		

EE80-

Order Example

EE80-2CT3D04

Version with voltage output:
Working range: 0...2000ppm
Model: CO₂ + T
Output: 0-10V
Display: with display
T-Unit: °C
T-Scale: 0...50°C (32...122°F)

Accessories

- humidity plug-in module (HA011003)